



Transmit



Receive



Decode




Control

## Transmitter Module RTM05

Baseline

The Transmitter Module RTM05 can be controlled by 4 Low-active inputs. This enables sending 15 different telegrams depending on the input connection.

The signal is sent as long as the inputs are activated. After 36 seconds the transmission is automatically disconnected.

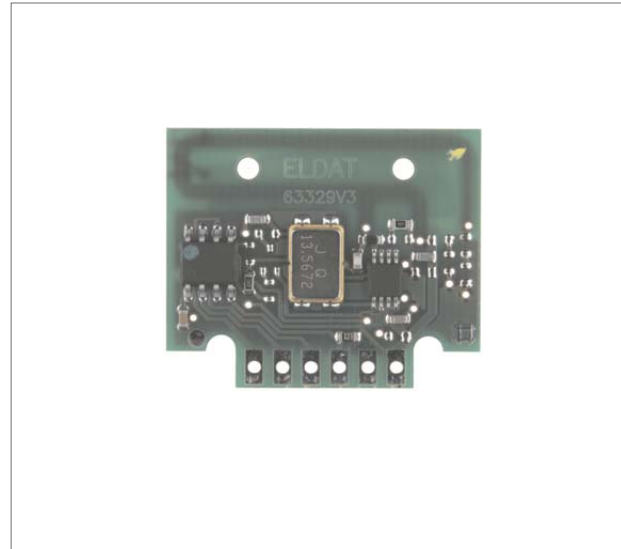


RTM05-XX04M-01

### Technical Details

Coding	factory coding with over 70 million options,
Channels	15 (radiograms)
Range	30 m
Power Supply	2 to 4 V DC
Current Consumption	standby: approx. 5 $\mu$ A, transmission: approx. 12 mA
Operating Temperature	-20 °C to +60 °C
Dimensions	28 x 24 x 12 mm

### Connection Diagram

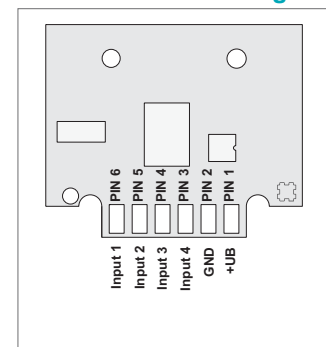

### Scope of Delivery

- Transmitter Module
- Operating manual

### Models

Product Key	Description	Frequency
RTM05-4104M-01	Transmitter Module	433,92 MHz
RTM05-5004M-01	Transmitter Module	868,30 MHz