

RTS39 Flush-mounted transmitter

Up to three 230 V buttons or two 230 V switches can be connected to the RTS39 stationary transmitter.

In this way, any standard 230 V button or switch can control an Easywave radio receiver using a radio signal, without need for complicated wiring.




RTS39E5003-02-23K

Technical specifications



Coding	factory coding with Easywave Telegram
Frequency	868.30 MHz
Channels	3
Range	typically 75 m in good free-field conditions
Power supply	230 V AC, 50 Hz
Power consumption	maximum 0.7 W
Operation	via connected button/switch
Function	depends on the receiver (see Models)
Operating temperature	-20 °C to +60 °C
Dimensions	48 x 48 x 25 mm
Weight	32 g

Wiring diagram

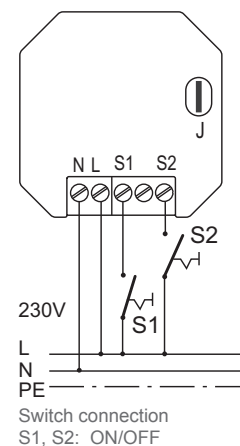

Scope of delivery

- Flush-mounted transmitter
- Operating manual

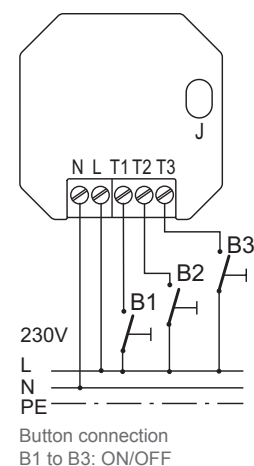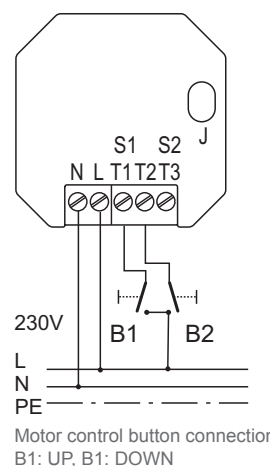

Models

Product numbers	Description	Function
RTS39E5003-02-23K	Flush-mounted transmitter 3-channel	2x ON/OFF (switch) 3x ON/OFF (button) 3x PULSE (button)