

RCD22 Radio control with serial interface

The RCD22 transmits and receives Easywave telegrams. It is controlled via an RS232 interface in HEX format. The control and evaluation software has to be created by the user.

Where environmental conditions are unfavorable, the external antenna ACC-ANT50-03-21P can be connected to improve wireless reception. This is not included with the product, but can be ordered separately.




RCD22E5001A02

Technical Data

Coding	Easywave
Frequency	868.30 MHz
Channel	1
Power supply	230 VAC, 50 Hz
Power consumption	1.5 W standby
Output	RS232 interface
Degree of Protection	IP66 (in delivery state)
Operating temperature	-20 °C to +60 °C
Dimensions (w/l/h)	130/94/57 mm

Wiring diagram

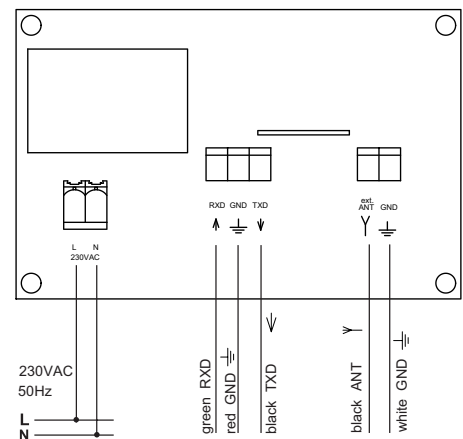

Scope of Delivery

- Radio control
- Mounting accessories
- Operating instructions

Accessories (optional)

ACC-ANT50-03-21P 868,30 MHz external antenna
cable length 5 m



ACC-ANT50-03-21P

Models

Product numbers	Description
RCD22E5001A02	Radio control 1-channel, 230 V, RS232 interface