

## RTS39 Flush-mounted transmitter ON/OFF | PULSE

Up to two 230 V buttons or two 230 V switches can be connected to the RTS39 stationary transmitter.

This allows any commercially available 230V button or 230V switch, to switch Easywave radio receivers via radio without any complex rewiring.

The flat design facilitates installation in flush-mounted sockets, behind switches or behind push buttons.




RTS39E5002D01-K


### Technical specifications

Coding	Factory coding with Easywave telegram
Frequency	868.30 MHz
Channels	2
Range	typically 150 m in good free-field conditions
Power supply	230 VAC, 50Hz
Power consumption	maximum 0.43W 0.1W stand by
Operation	by connected button/switch
Operating temperature	-20 °C to +60 °C
Dimensions (W/L/H)	43/42/17.5 mm
Weight	32g


### Wiring diagram

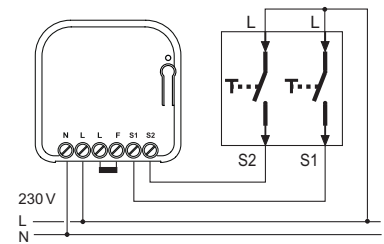

Switch connection  
S1, S2: ON/OFF  
(2-button operation)

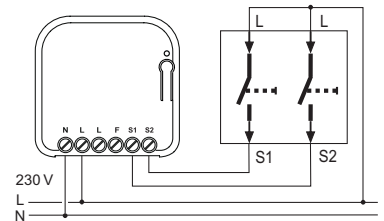

Button connection  
S1, S2: ON/OFF  
(1-button operation)

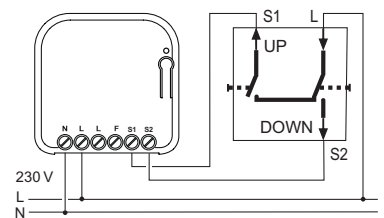

Motor control button  
connection  
S1: UP, S2: DOWN  
(2-button operation)

### Scope of delivery

- Flush-mounted transmitter
- Operating manual

### Models

Product numbers	Description
RTS39E5002D01-K	Flush-mounted transmitter, Easywave, 2x ON/OFF / 2x PULSE, 230V